

**Broca calibradora, haste cone morse.**  
Core drills, morse taper shank.




### 4002

DIN 343 - série curta / short

### 4003

DIN 1864 - série longa / long

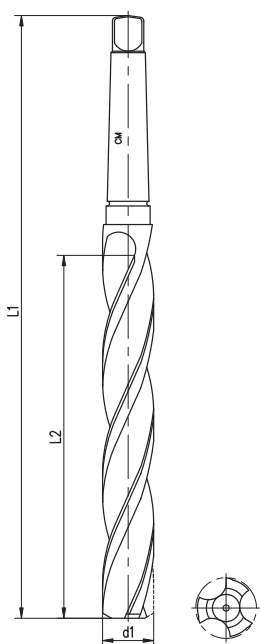

d1 h8 mm	curta L2 / L1 mm	longa L2 / L1 mm	CM	Z
8	75 / 156	100 / 181	1	3
9	81 / 162	107 / 188	1	3
10	87 / 168	116 / 197	1	3
11	94 / 175	125 / 206	1	3
12	101 / 182	134 / 215	1	3
13	101 / 182	134 / 215	1	3
14	108 / 189	142 / 223	1	3
15	114 / 212	147 / 245	2	3
16	120 / 218	153 / 251	2	3
17	125 / 223	159 / 257	2	3
18	130 / 228	165 / 263	2	3
19	135 / 233	171 / 269	2	3
20	140 / 238	177 / 275	2	3
21	145 / 243	184 / 282	2	3
22	150 / 248	191 / 289	2	3
23	155 / 253	198 / 296	2	3
24	160 / 281	206 / 327	3	3
25	160 / 281	206 / 327	3	3
26	165 / 286	214 / 335	3	3
27	170 / 291	222 / 343	3	3
28	170 / 291	222 / 343	3	3
29	175 / 296	230 / 351	3	3
30	175 / 296	230 / 351	3	3
31	180 / 301	239 / 360	3	3
32	185 / 334	-	4	3
33	185 / 334	-	4	3
34	190 / 339	-	4	3
35	190 / 339	-	4	3
36	195 / 344	-	4	3
37	195 / 344	-	4	3
38	200 / 349	-	4	3
39	200 / 349	-	4	3
40	200 / 349	-	4	3
41	205 / 354	-	4	3
42	205 / 354	-	4	3
43	210 / 359	-	4	3
44	210 / 359	-	4	3
45	210 / 359	-	4	3
46	215 / 364	-	4	3
47	215 / 364	-	4	3
48	220 / 369	-	4	3
49	220 / 369	-	4	3
50	220 / 369	-	4	3